


O.C.M.
Plugs

O.C.M. INDUSTRIAL PRODUCTS

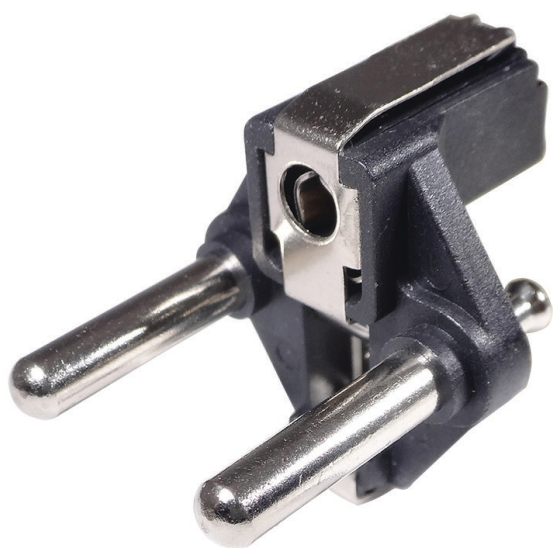

***“In the production of electrical household
appliances your starting point”***

O.C.M-01 S Europe Plug Insert



Current/Voltage : 2.5A 250V



Pin Type : Solid Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : ROHS , TÜVRheinland

Packaging : 3000 Pcs./Box

Color : White

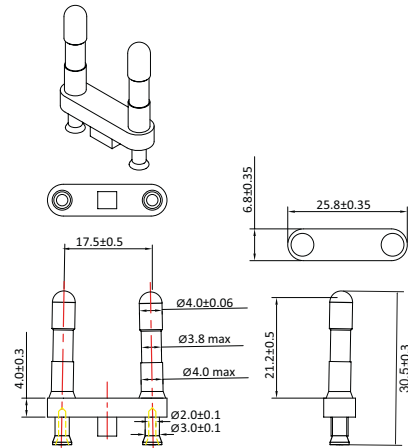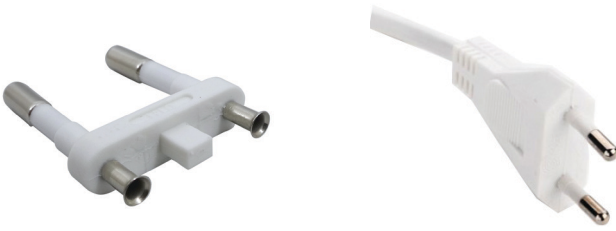

O.C.M-03 S Holland Plug Insert



Current/Voltage : 10A 250V


Pin Type : Solid Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : ROHS , TÜVRheinland

Packaging : 1600 Pcs./Box


Color : Black

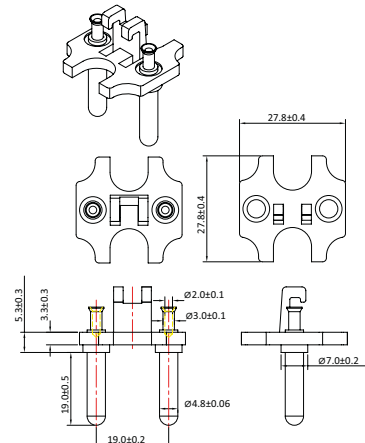


OCM-08 SL French Plug Insert



Color : Black

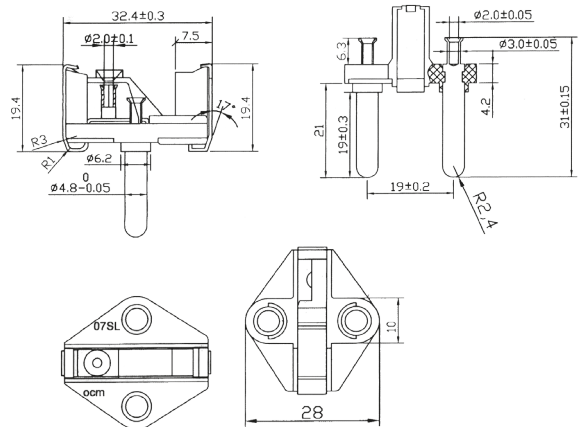

Color : Black

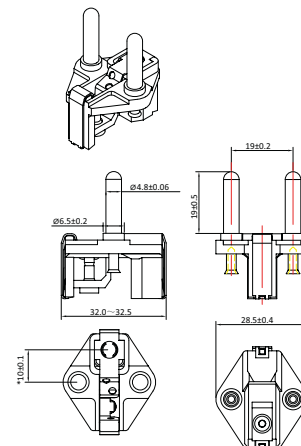

OCM-09 S English Plug Insert



Current/Voltage : 13A 250V Sigortalı


Pin Type : Solid Pin Three Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : ROHS

Packaging : 500 Pcs./Box

Color : Black

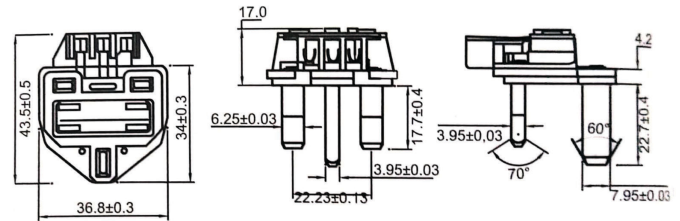

OCM-09 ST English Plug Insert



Current/Voltage : 13A 250V Sigortalı



Pin Type : Solid Pin Two Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : ROHS

Packaging : 500 Pcs./Box

Color : Black

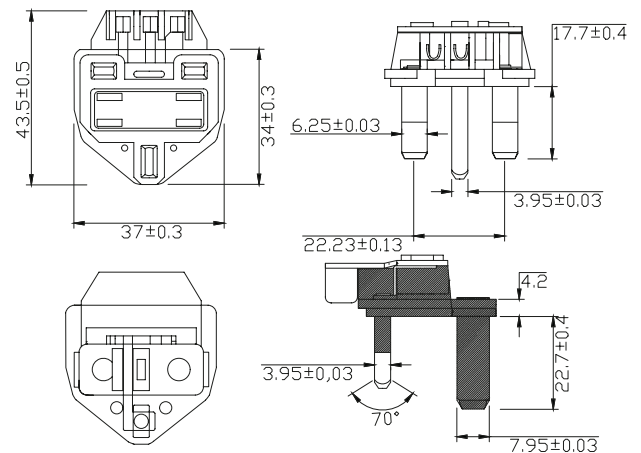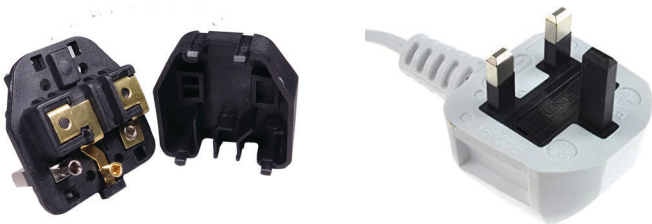

OCM-11 S South Africa Plug Insert



Current/Voltage : 16A 250V


Pin Type : Solid Pin Three Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : Glow Wire

Packaging : 500 Pcs./Box

Color : White

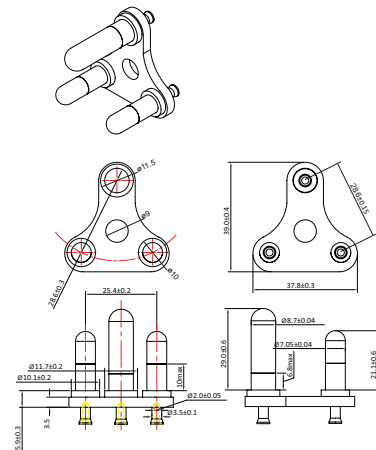

OCM-11 ST South Africa Plug Insert



Current/Voltage : 16A 250V


Pin Type : Solid Pin Two Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : Glow Wire

Packaging : 500 Pcs./Box

Color : Black

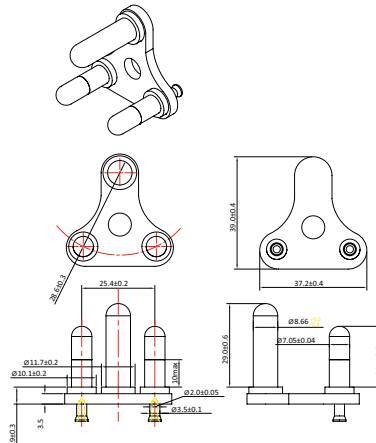

OCM-12 ST American Plug Insert



Current/Voltage : 16A 110V


Pin Type : Solid Pin Two Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit ,
fireproof.

Standard : ROHS

Packaging : 500 Pcs./Box

Color : Black

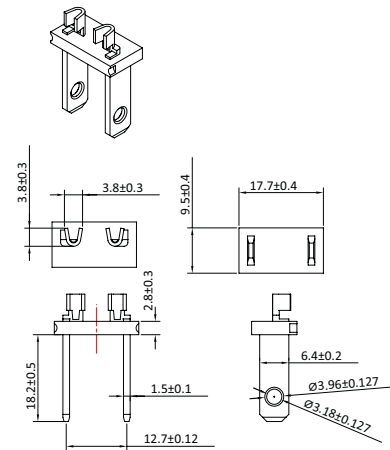

OCM-14 S Israel Plug Insert



Current/Voltage : 16A 230V



Pin Type : Solid Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : -

Packaging : 1200 Pcs./Box

Color : Black

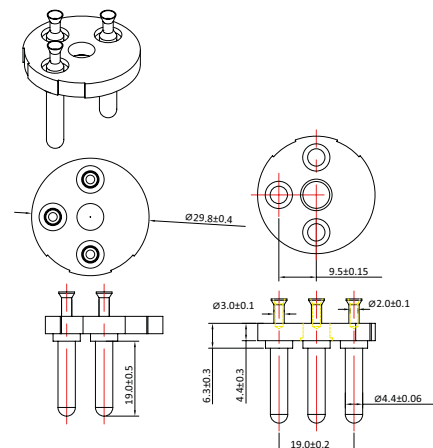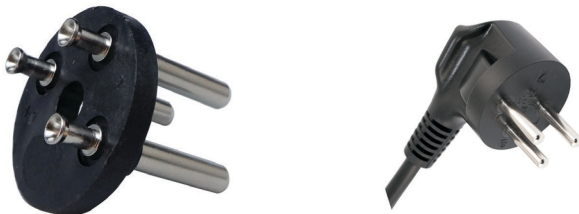

OCM-15 S 4 (4,0 mm) Brazil Plug Insert



Current/Voltage : 10A 220V


Pin Type : Solid Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : -

Packaging : 2000 Pcs./Box

Color : Black

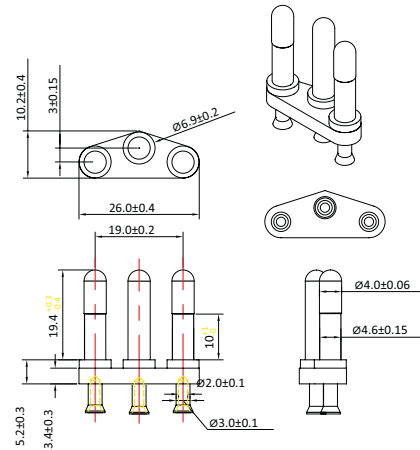

OCM-15 S 4,8 (4,8 mm) Brazil Plug Insert



Current/Voltage : 10A 220V


Pin Type : Solid Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : -

Packaging : 2000 Pcs./Box

Color : Black

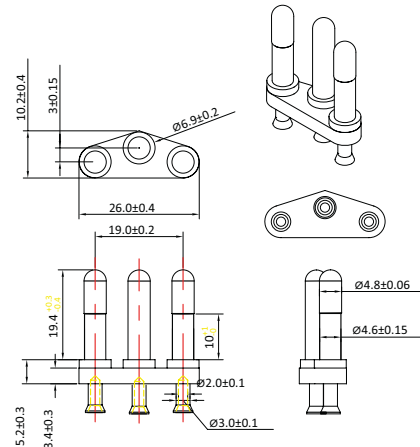

OCM-16 S Switzerland Plug Insert



Current/Voltage : 10A 230V


Pin Type : Solid Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : -

Packaging : 2000 Pcs./Box

Color : Black

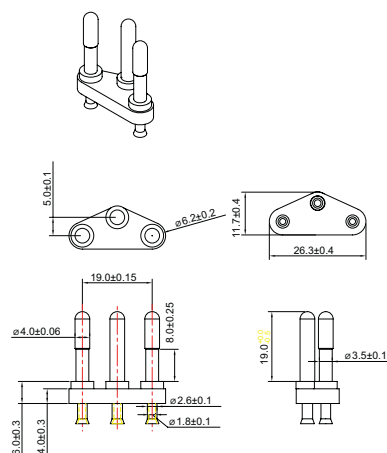

OCM-17 S Argentina Plug Insert



Current/Voltage : 10A 230V


Pin Type : Solid Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : -

Packaging : 2000 Pcs./Box

Color : White

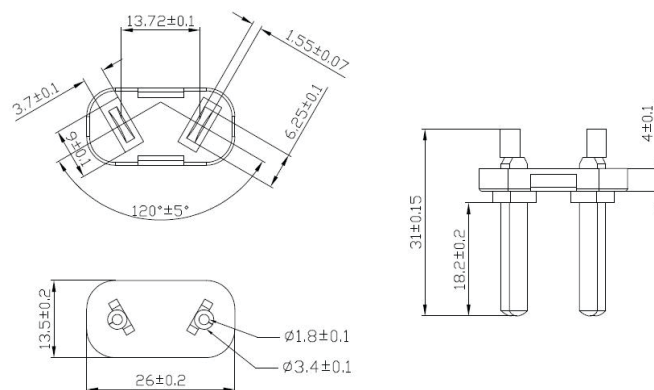

OCM-18 S Argentina Plug Insert



Current/Voltage : 10A 230V


Pin Type : Solid Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : -

Packaging : 2000 Pcs./Box

Color : Black

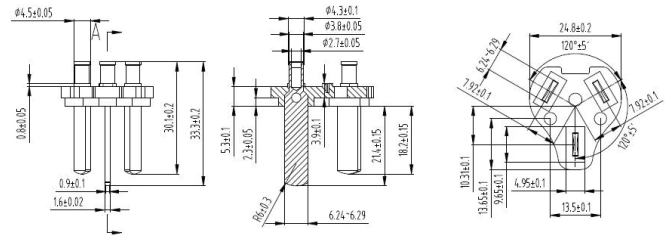

OCM-01 H Europe Plug Insert



Current/Voltage : 2.5A 250V



Pin Type : Hollow Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.


Standard : ROHS , TÜVRheinland

Packaging : 3000 Pcs./Box

Color : White

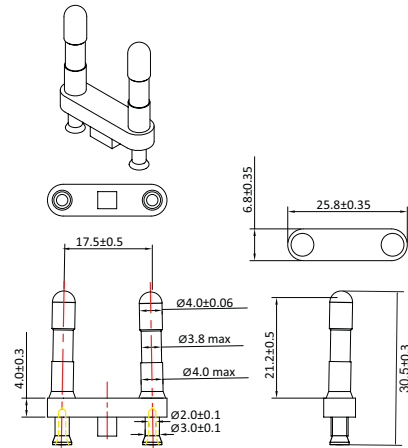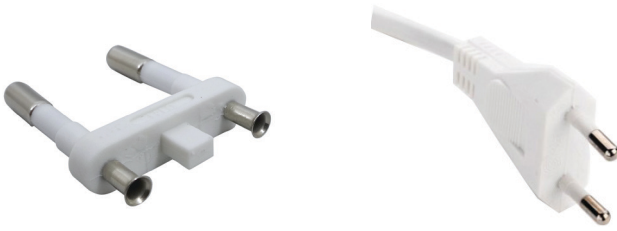

OCM-01 HX Europe Plug Insert

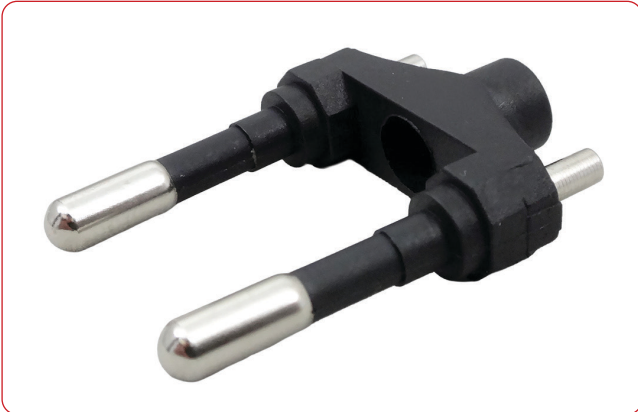

Current/Voltage : 2.5A 250V

Pin Type : Hollow Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : -

Packaging : 3000 Pcs./Box

Color : Black



OCM-03 H Holland Plug Insert



Current/Voltage : 10A 250V


Pin Type : Hollow Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit ,
fireproof.

Standard : ROHS , TÜVRheinland

Packaging : 1600 Pcs./Box

Color : Black

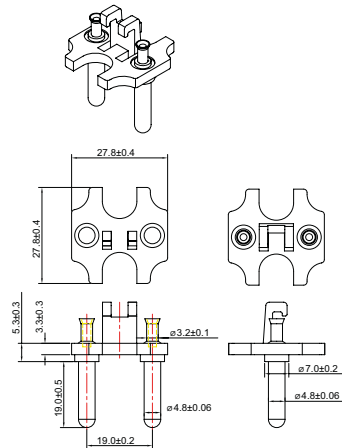

OCM-07 HL Turkey Plug Insert



Current/Voltage : 16A 250V


Pin Type : Hollow Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit ,
fireproof.

Standard : ROHS , TÜVRheinland

Packaging : 1000 Pcs./Box

Color : Black

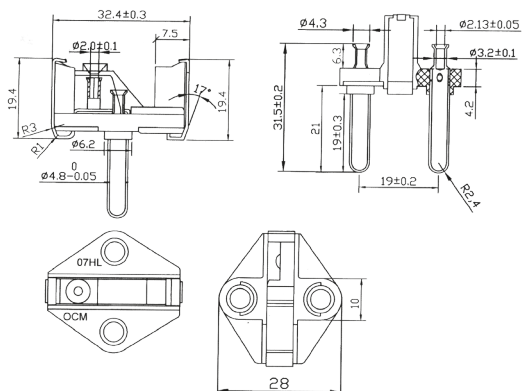

OCM-08 HL French Plug Insert



Current/Voltage : 16A 250V


Pin Type : Hollow Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : ROHS , TÜVRheinland

Packaging : 1000 Pcs./Box

Color : Black

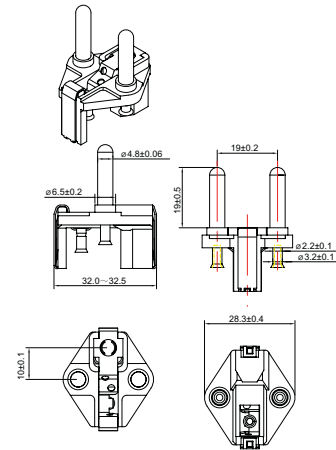

OCM-11 H South Africa Plug Insert



Current/Voltage : 16A 250V


Pin Type : Hollow Pin Three Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : Glow Wire

Packaging : 500 Pcs./Box

Color : White

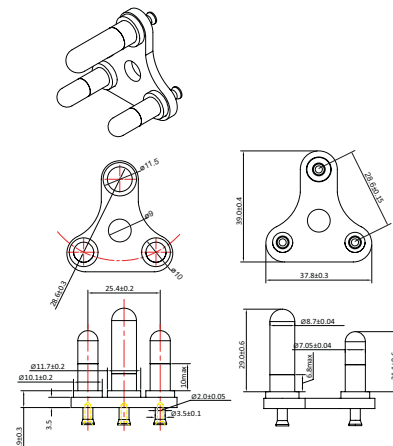

OCM-11 HT South Africa Plug Insert



Current/Voltage : 16A 250V



Pin Type : Hollow Pin Two Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit ,
fireproof.

Standard : Glow Wire

Packaging : 500 Pcs./Box

Color : Black

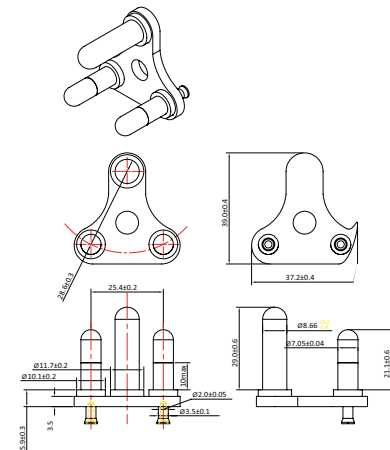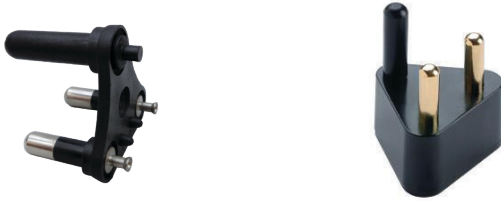

OCM-12 H American Plug Insert



Current/Voltage : 16A 110V


Pin Type : Hollow Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit ,
fireproof.

Standard : ROHS

Packaging : 500 Pcs./Box

Color : Black

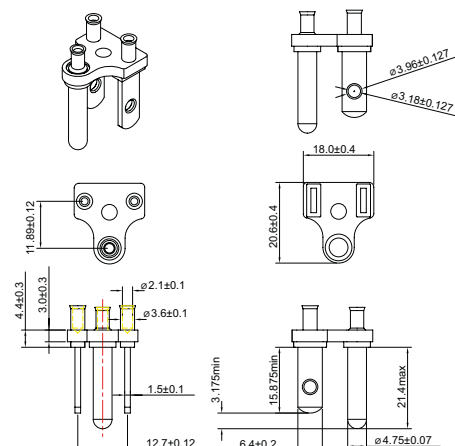

OCM-15 H 4 (4,0 mm) Brazil Plug Insert



Current/Voltage : 10A 220V


Pin Type : Hollow Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : -

Packaging : 2000 Pcs./Box

Color : Black

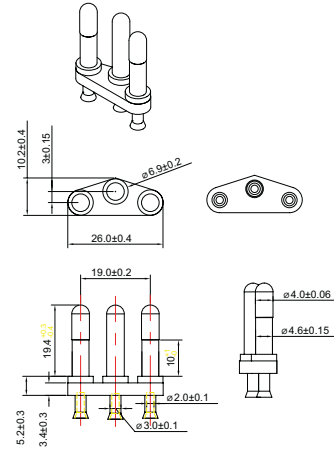

OCM-15 H 4,8 (4,8 mm) Brazil Plug Insert



Current/Voltage : 10A 220V


Pin Type : Hollow Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.

Standard : -

Packaging : 2000 Pcs./Box

Color : Black

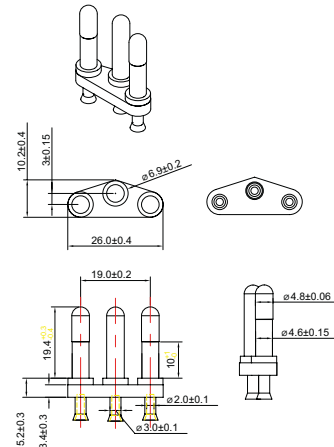

OCM-16 H Switzerland Plug Insert



Current/Voltage : 10A 230V


Pin Type : Hollow Pin

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.


Standard : -

Packaging : 2000 Pcs./Box

Color : Black

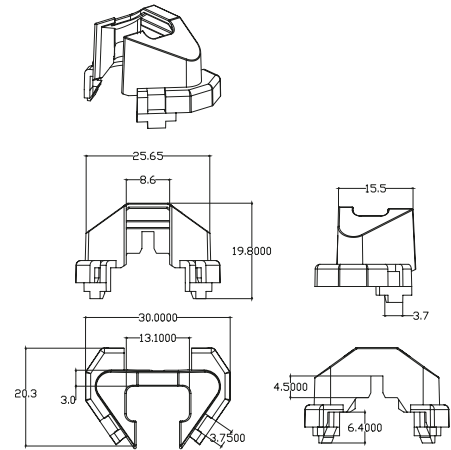

OCM-08 CV Cover

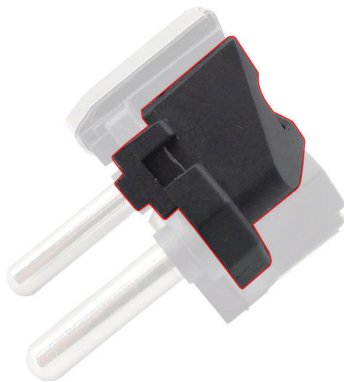

Current/Voltage : -


Pin Type : -

Raw Materials : % 30 glass fiber plastic PBT antrasit , fireproof.


Standard : -

Packaging : -


Color : Black

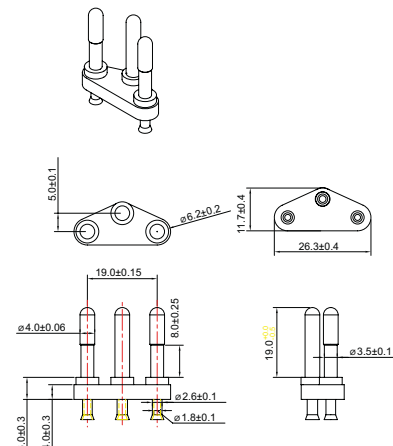

O.C.M-10 D1 Computer Socket

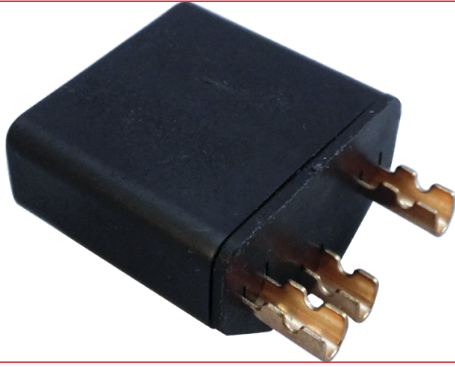

Current	: 10A
Raw Materials	: % 30 glass fiber plastic PBT antrasit , fireproof.
Packaging	: 2000 Pcs./Box
Color	: Black

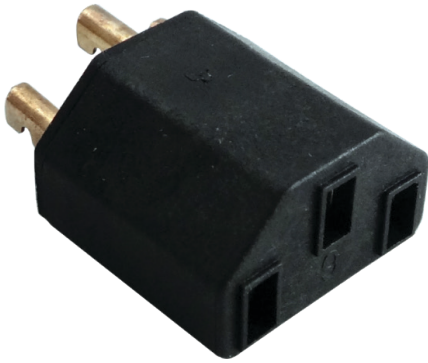

O.C.M-10 E1 Computer Socket



Current	: 10A
Raw Materials	: % 30 glass fiber plastic PBT antrasit , fireproof.
Packaging	: 2000 Pcs./Box
Color	: Black



O.C.M-10 E2 Computer Socket



Current : 10A


Raw Materials : % 30 glass fiber plastic PBT antrasit ,
fireproof.

Packaging : 2000 Pcs./Box


Color : Black



O.C.M-20 Socket

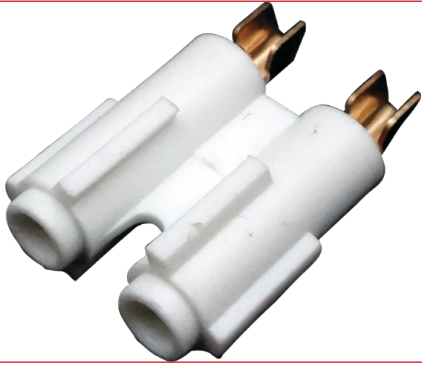

Current	: 10A
Raw Materials	: % 30 glass fiber plastic PBT antrasit , fireproof.
Packaging	: 2000 Pcs./Box
Color	: White

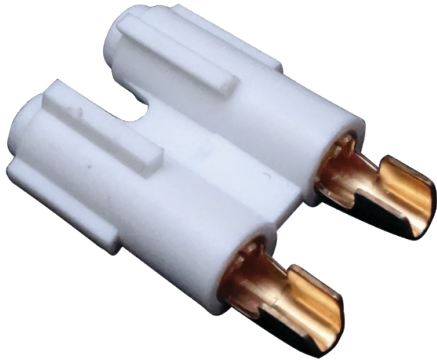

O.C.M-22 Socket



Current	: 10A
Raw Materials	: % 30 glass fiber plastic PBT antrasit , fireproof.
Packaging	: 2000 Pcs./Box
Color	: Black



O.C.M-23 Socket



Current : 10A 220V


Raw Materials : % 30 glass fiber plastic PBT antrasit ,
fireproof.

Packaging : 2000 Pcs./Box

Color : Black




O.C.M EB-002 PL Electric Blanket Switch

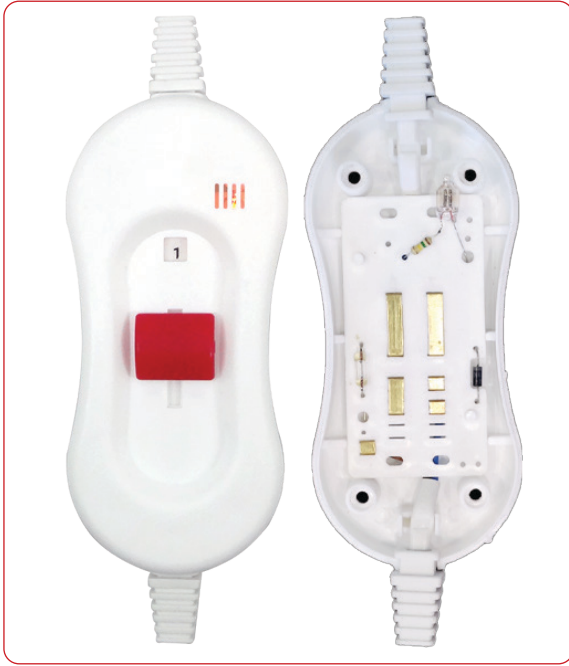

Component	: Placket brass contact component
Contact Break	: Double contact break in on/off direction
Fuse	: Fused
Number of Stages	: Four stage (Off-Warm-Hot-Off)
Voltage	: 220V 50 Hz
Switch Standard	: CE , ROHS , TSE
Cable Standard	: -
Cable Specs	: -
Cable Size	: -
Color	: White

O.C.M EB-002 PCB Electric Blanket Switch

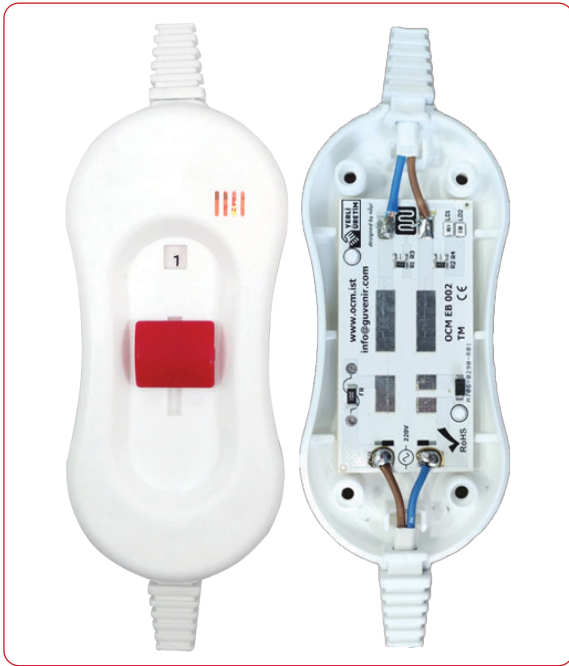

Component	: Electronic PCB component Double LED
Contact Break	: Double contact break in on/off direction
Fuse	: Fused
Number of Stages	: Four stage (Off-Warm-Hot-Off)
Voltage	: 220V 50 Hz
Switch Standard	: CE , ROHS , TSE
Cable Standard	: -
Cable Specs	: -
Cable Size	: -
Color	: White

O.C.M EB-002 PL K Electric Blanket Switch with Cable



Component	: Placket brass contact component
Contact Break	: Double contact break in on/off direction
Fuse	: Fused
Number of Stages	: Four stage (Off-Warm-Hot-Off)
Voltage	: 220V 50 Hz
Switch Standard	: CE , ROHS , TSE
Cable Standard	: CE , TÜV
Cable Specs	: 2x0.50 , HO3VVH2-F
Cable Size	: 2m
Color	: White

O.C.M EB-002 PCB K Electric Blanket Switch with Cable



Component	: Electronic PCB component Double LED
Contact Break	: Double contact break in on/off direction
Fuse	: Fused
Number of Stages	: Four stage (Off-Warm-Hot-Off)
Voltage	: 220V 50 Hz
Switch Standard	: CE , ROHS , TSE
Cable Standard	: CE , TÜV
Cable Specs	: 2x0.50 , HO3VVH2-F
Cable Size	: 2m
Color	: White

O.C.M EB-002 PL KTF Wired Electric Blanket Switch with Socket




Component	: Placket brass contact component
Contact Break	: Double contact break in on/off direction
Fuse	: Fused
Number of Stages	: Four stage (Off-Warm-Hot-Off)
Voltage	: 220V 50 Hz
Switch Standard	: CE , ROHS , TSE
Cable Standard	: CE , TÜV
Cable Specs	: 2x0.50 , HO3VVH2-F
Cable Size	: 2m
Color	: White

O.C.M EB-002 PCB KTF Wired Electric Blanket Switch with Socket




Component	: Electronic PCB component Double LED
Contact Break	: Double contact break in on/off direction
Fuse	: Fused
Number of Stages	: Four stage (Off-Warm-Hot-Off)
Voltage	: 220V 50 Hz
Switch Standard	: CE , ROHS , TSE
Cable Standard	: CE , TÜV
Cable Specs	: 2x0.50 , HO3VVH2-F
Cable Size	: 2m
Color	: White

O.C.M 001-A Single Wrapped Electric Blanket Wire

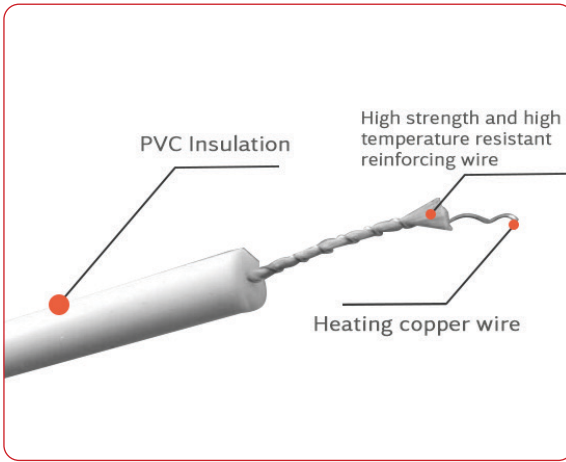


Usage Area	: Single Blanket
Resistance Resistor/Ohm	: 45 Ω
Wire Diameter	: $\varnothing$ 2,0 mm
Wire Isolation Diameter	: -
Wire Alloy	: Cr Ni Resistance wire
Packaging	: 3000 m - spool
Standard	: TUVRheinland

O.C.M 001-B Single Wrapped Electric Blanket Wire

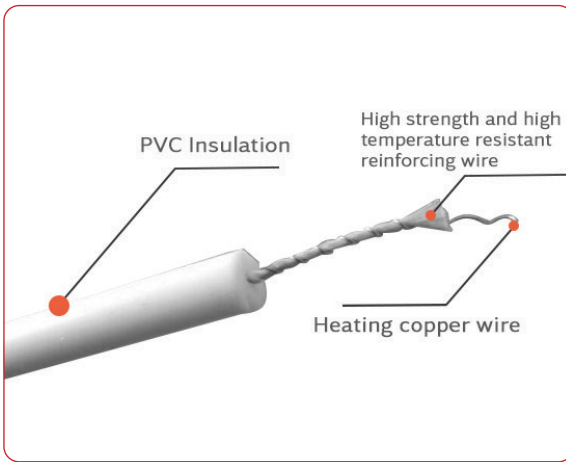


Usage Area	: Double Blanket
Resistance Resistor/Ohm	: 24 Ω
Wire Diameter	: $\varnothing$ 2,0 mm
Wire Isolation Diameter	: -
Wire Alloy	: Cr Ni Resistance wire
Packaging	: 3000 m - spool
Standard	: TUVRheinland

O.C.M 002-A Double Wrapped Electric Blanket Wire

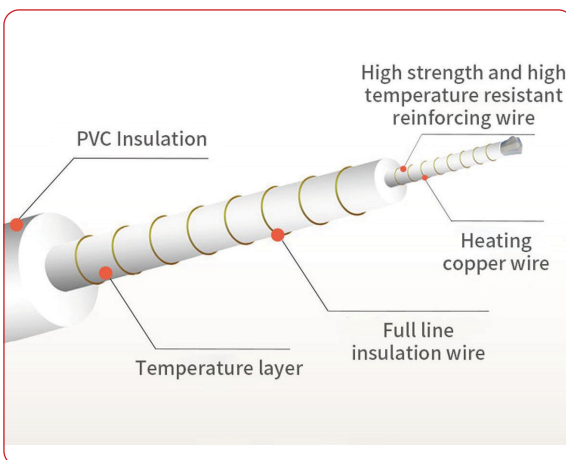


Usage Area	: Single Blanket
Resistance Resistor/Ohm	: 45 Ω
Wire Diameter	: $\varnothing$ 2,4 mm
Wire Isolation Diameter	: -
Wire Alloy	: Cr Ni Resistance wire
Packaging	: 2000 m - spool
Standard	: TUVRheinland

O.C.M 002-B Double Wrapped Electric Blanket Wire

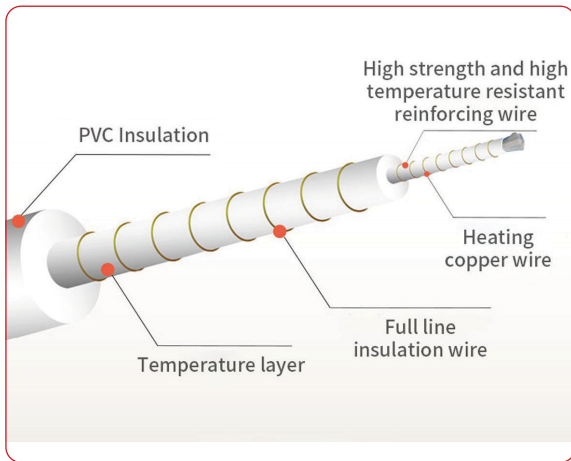


Usage Area	: Double Blanket
Resistance Resistor/Ohm	: 24 Ω
Wire Diameter	: $\varnothing$ 2,4 mm
Wire Isolation Diameter	: -
Wire Alloy	: Cr Ni Resistance wire
Packaging	: 2000 m - spool
Standard	: TUV Rheinland

O.C.M 003-A Standard Electric Blanket Wire

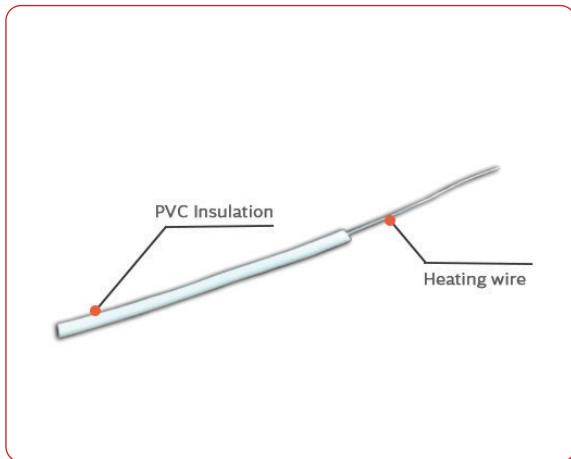


Usage Area	: Single Blanket
Resistance Resistor/Ohm	: 45 Ω
Wire Diameter	: $\varnothing$ 1,6 mm
Wire Isolation Diameter	: $\varnothing$ 0,25 mm
Wire Alloy	: Cr Ni Resistance wire
Packaging	: 2500 m - spool
Standard	: Insulation; Heat resistant, flame retardant

O.C.M 003-B Standard Electric Blanket Wire

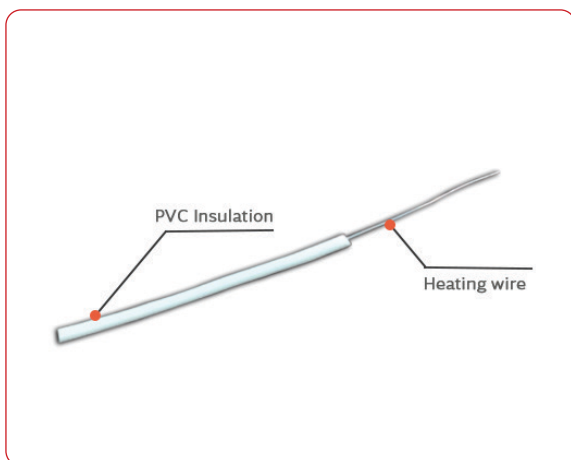


Usage Area	: Double Blanket
Resistance Resistor/Ohm	: 22 Ω
Wire Diameter	: $\varnothing$ 1,6 mm
Wire Isolation Diameter	: $\varnothing$ 0,25mm
Wire Alloy	: Cr Ni Resistance wire
Packaging	: 2500 m - spool
Standard	: Insulation; Heat resistant, flame retardant

O.C.M 004 Electric Blanket Junction Box

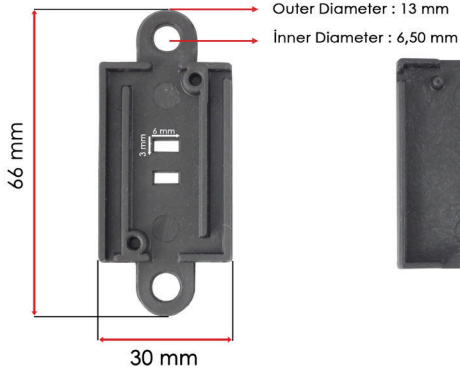


Cable connection box with electric blanket heating element

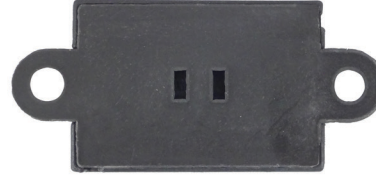



O.C.M 005-S Electric Blanket Socket Kit



Cable and socket set with detachable function for Electric Blanket

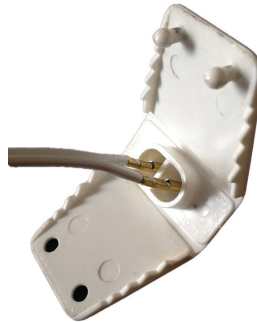

Resistance Wire | Socket Cable

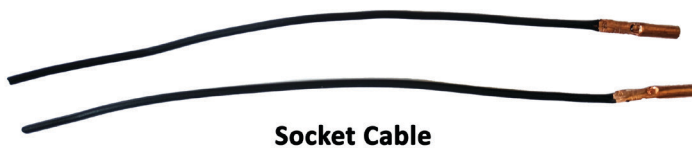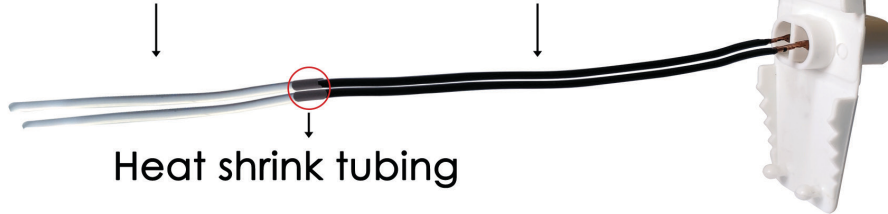

*Resistance wire can be connected to the socket or connected using an intermediate cable

O.C.M N-01 NE-2-4X10-15X15-100K




Color : Medium Brightness
 Package Pieces : 500 Pcs.
 Box Pieces : 100 Package (50.000 Pcs.)
 Parcel Pieces : 2x Box (100.000 Pcs.)
 Parcel Size : L:345 W:285 H:435
 Parcel Weight : 26/23 Kg. (Gross/Net)
 Standard : ROHS, CE



Dim	Description	Dimensions	
A	Lamp Diameter	4	
B	Electrode Length	-	
C	Lead wire Length	15	
D	Lamp Length	10	
E	Lead wire To Resistor	4	
F	Resistor Lead Length	5	
G	Overall Length of Lead	15	
R	Resistor Length(1/4w)	6	

O.C.M N-02 NE-2-6X13-15X15-150K

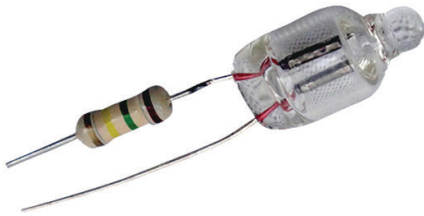

Color : Medium Brightness
 Package Pieces : 200 Pcs.
 Box Pieces : 125 Package (25.000 Pcs.)
 Parcel Pieces : 2x Box (50.000 Pcs.)
 Parcel Size : L:345 W:285 H:435
 Parcel Weight : 26/23 Kg. (Gross/Net)
 Standard : ROHS, CE



Dim	Description	Dimensions	
A	Lamp Diameter	6	
B	Electrode Length	-	
C	Lead wire Length	15	
D	Lamp Length	13	
E	Lead wire To Resistor	4	
F	Resistor Lead Length	5	
G	Overall Length of Lead	15	
R	Resistor Length(1/4w)	6	

O.C.M N-03 NE-2-6X13-30X30-150K



Color : Medium Brightness
 Package Pieces : 200 Pcs.
 Box Pieces : 125 Package (25.000 Pcs.)
 Parcel Pieces : 2x Box (50.000 Pcs.)
 Parcel Size : L:345 W:285 H:435
 Parcel Weight : 26/23 Kg. (Gross/Net)
 Standard : ROHS, CE

Dim	Description	Dimensions	
A	Lamp Diameter	6	
B	Electrode Length	-	
C	Lead wire Length	30	
D	Lamp Length	13	
E	Lead wire To Resistor	4	
F	Resistor Lead Length	20	
G	Overall Length of Lead	30	
R	Resistor Length(1/4w)	6	


O.C.M N-04 NE-2-6X13-30X30



Color : Medium Brightness
 Package Pieces : 200 Pcs.
 Box Pieces : 125 Package (25.000 Pcs.)
 Parcel Pieces : 2x Box (50.000 Pcs.)
 Parcel Size : L:345 W:285 H:435
 Parcel Weight : 26/23 Kg. (Gross/Net)
 Standard : ROHS, CE

Dim	Açıklama	Ölçüler	
A	Lamba Çapı	6	
B	Elektrot Uzunluğu	-	
C	Toplam Tel-Ayak Uzunluğu	30	
D	Lamba Boyu	13	
E	Direnç-Lamba Arası Uzunluk	-	
F	Dirençten Sonraki Tel Ayak Uzunluğu	-	
G	Dirençli Toplam Ayak Uzunluğu	-	
R	Direncin Boyu	-	

O.C.M N-05 NE-2G-6X13-30X30-150K

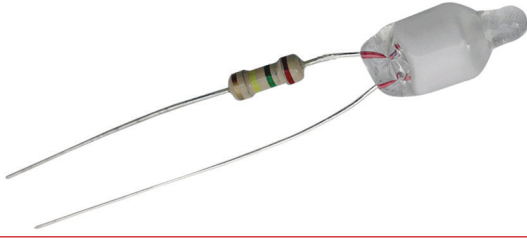

Color	: Green
Package Pieces	: 200 Pcs.
Box Pieces	: 125 Package (25.000 Pcs.)
Parcel Pieces	: 2x Box (50.000 Pcs.)
Parcel Size	: L:345 W:285 H:435
Parcel Weight	: 26/23 Kg. (Gross/Net)
Standard	: ROHS, CE

Dim	Description	Dimensions	
A	Lamp Diameter	6	
B	Electrode Length	-	
C	Lead wire Length	30	
D	Lamp Length	13	
E	Lead wire To Resistor	4	
F	Resistor Lead Length	20	
G	Overall Length of Lead	30	
R	Resistor Length(1/4w)	6	

O.C.M N-06 NE-2-5X16-6X34-820K



Color	: Medium Brightness
Package Pieces	: 100 Pcs.
Box Pieces	: 100 Package (10.000 Pcs.)
Parcel Pieces	: 2x Box (20.000 Pcs)
Parcel Size	: L:345 W:285 H:435
Parcel Weight	: 26/23 Kg. (Gross/Net)
Standard	: ROHS, CE


***Used in control item**

Dim	Description	Dimensions	
A	Lamp Diameter	5	
B	Electrode Length	-	
C	Lead wire Length	6	
D	Lamp Length	16	
E	Lead wire To Resistor	-	
F	Resistor Lead Length	-	
G	Overall Length of Lead	34	
R	Resistor Length(1/4w)	-	

O.C.M N-07 NE-2-4X10 1/4 W 150K RT 1/8 470K RT



Color	: Medium Brightness
Package Pieces	: 200 Pcs.
Box Pieces	: 125 Package (25.000 Pcs.)
Parcel Pieces	: 2x Box (50.000 Pcs.)
Parcel Size	: L:345 W:285 H:435
Parcel Weight	: 26/23 Kg. (Gross/Net)
Standard	: ROHS, CE

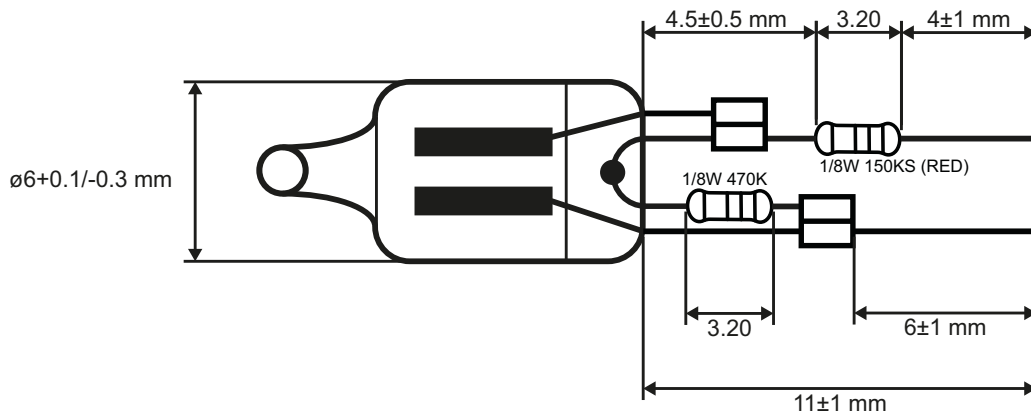

O.C.M N-08 NE-2-6X13 1/4 W 150K RT 1/8 470K RT



Color	: Medium Brightness
Package Pieces	: 100 Pcs.
Box Pieces	: 100 Package (10.000 Pcs.)
Parcel Pieces	: 2x Box (20.000 Pcs.)
Parcel Size	: L:345 W:285 H:435
Parcel Weight	: 26/23 Kg. (Gross/Net)
Standard	: ROHS, CE

